




Electric window

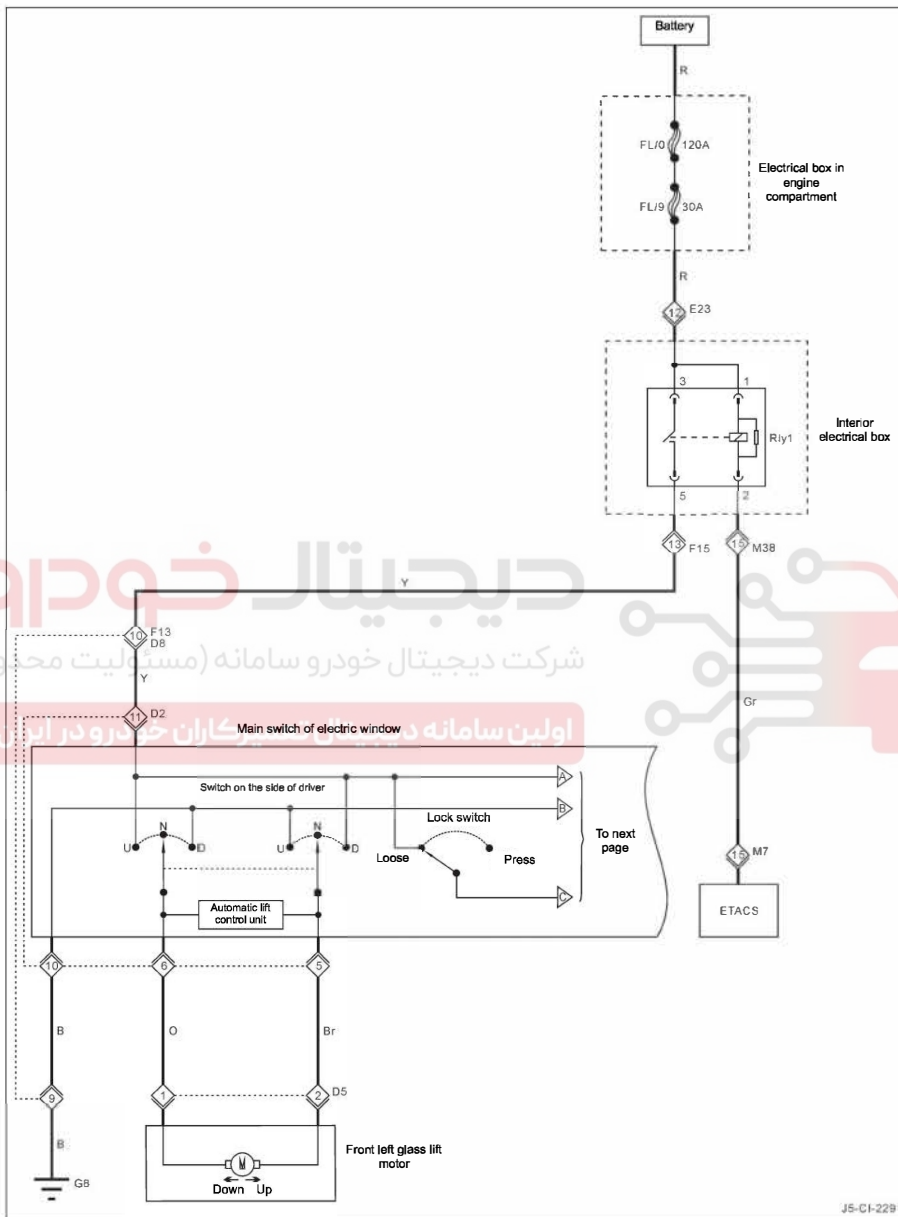

JS-CI-229

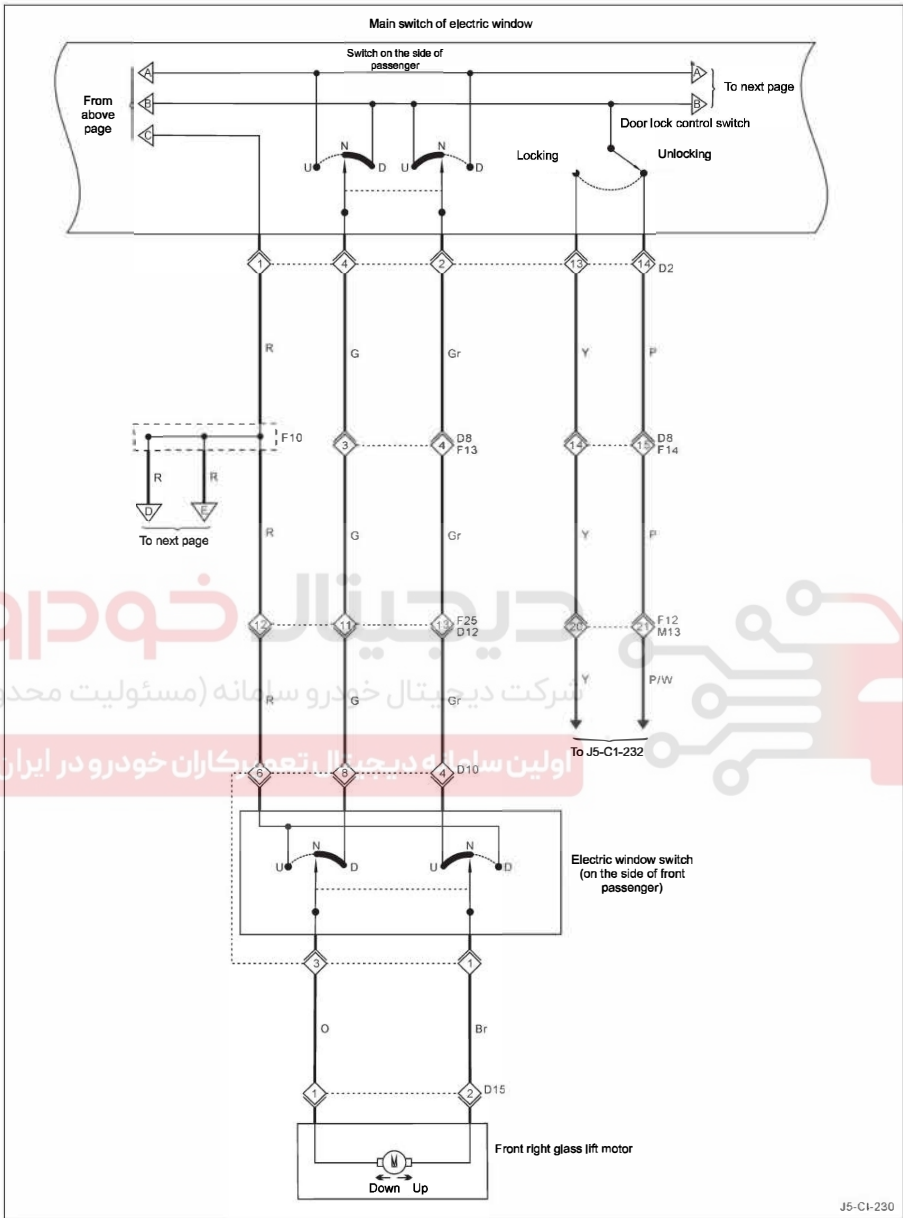

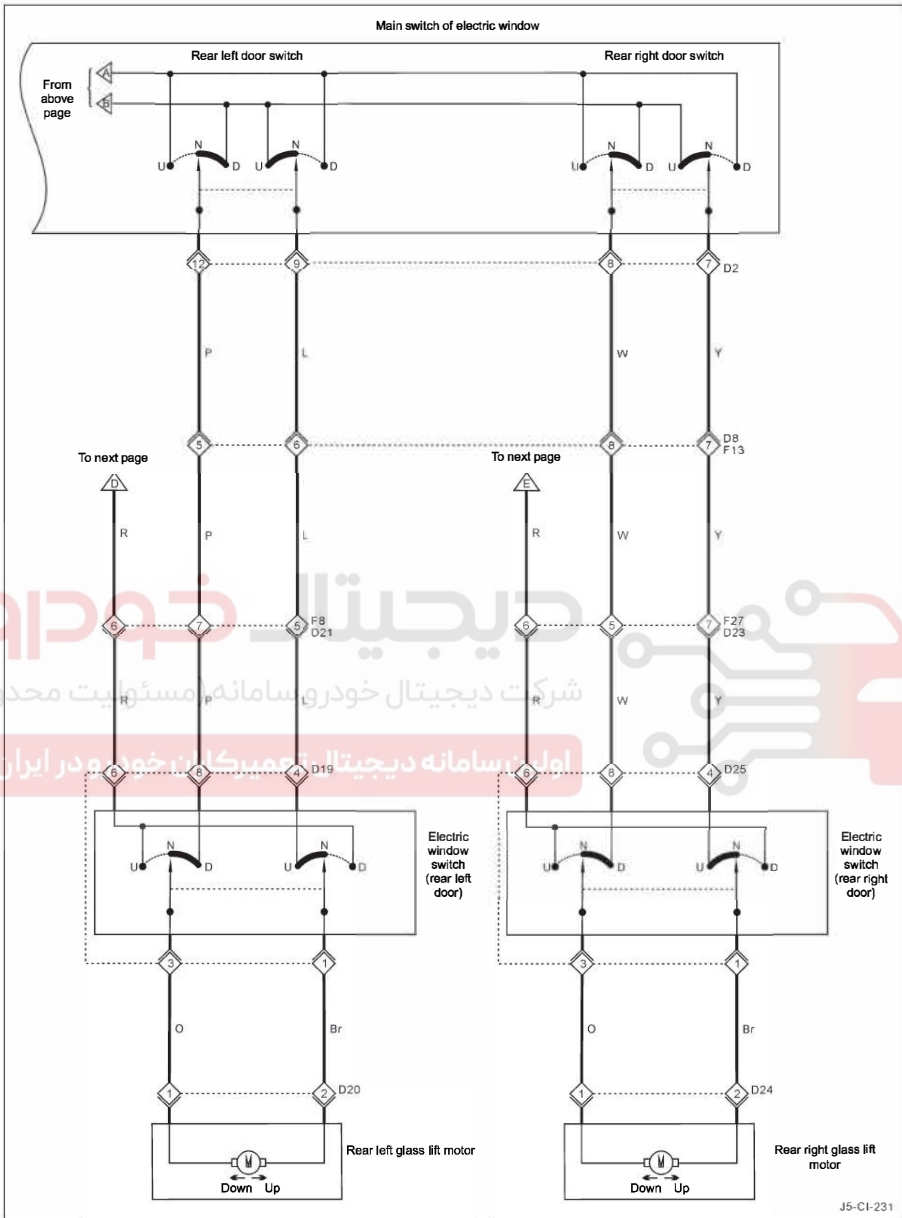

CI - 62

Circuit diagram

## ◊ harness plug

No.	No.	Description of harness plug
F8	D21	Vehicle frame harness – rear left door harness (below the left post B)
F13	D8	Vehicle frame harness – front left door harness (below the left post A)
F14	D8	Vehicle frame harness – front left door harness (below the left post A)
F25	D12	Vehicle frame harness – front right door harness (below the right post A)
F27	D23	Vehicle frame harness – rear right door harness (below the right post B)
M13	F12	Main harness – vehicle frame harness (below and on the left of dashboard)

## □: switch and electrical device

No.	Description	Position
D2	To glass lift switch	Front left door harness
D5	To front left glass lift motor	Front left door harness
D12	To glass lift switch	Front right door harness
D15	To front right glass lift motor	Front right door harness
D19	To glass lift switch	Rear left door harness
D20	To rear left glass lift motor	Rear left door harness
D24	To rear right glass lift motor	Rear right door harness
D25	To glass lift switch	Rear right door harness
E23	To interior electrical box (IP/F)	Engine harness
F15	To interior electrical box (IP/A)	Vehicle frame harness
M7	To ETACS	Main harness
M38	To interior electrical box (IP/J)	Main harness